


Technical Data
Data Sheet N0214, Rev. -

Features

- Glass Passivated Die Construction
- 5000W Peak Pulse Power Dissipation
- 120V – 220V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O
- UL Recognized File # E224235
- This is a Pb - Free Device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request

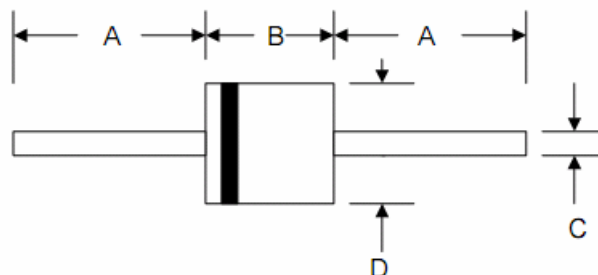

P-600				
Dim	Min	Max	Min	Max
A	25.4	—	1.000	—
B	8.60	9.10	0.339	0.358
C	1.20	1.30	0.047	0.051
D	8.60	9.10	0.339	0.358
	In ,mm		In inch	

Mechanical Data

- Case: JEDEC P-600 Molded Plastic
- Terminals: Axial Leads, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band
- Marking:
Unidirectional – Type Number and Cathode Band
Bidirectional – Device Number Only
Weight: 2.10 grams (approx.)

"C" Suffix Designates Bi-directional Devices
"A" Suffix Designates 5% Tolerance Devices
No Suffix Designates 10% Tolerance Devices

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Pulse Power Dissipation at T _A = 25°C (Note 1, 2, 5) Figure 3	P _{PPM}	5000 Minimum	W
Peak Forward Surge Current (Note 3)	I _{FSM}	400	A
Peak Pulse Current on 10/1000µS Waveform (Note 1) Figure 1	I _{PPM}	See Table 1	A
Steady State Power Dissipation (Note 2, 4)	P _{M(AV)}	8.0	W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +175	°C

- Note: 1. Non-repetitive current pulse, per Figure 1 and derated above T_A = 25°C per Figure 4.
 2. Mounted on 20mm² copper pad.
 3. 8.3ms single half sine-wave duty cycle = 4 pulses per minutes maximum.
 4. Lead temperature at 75°C = T_L.
 5. Peak pulse power waveform is 10/1000µS.

Technical Data
Data Sheet N0214, Rev. -

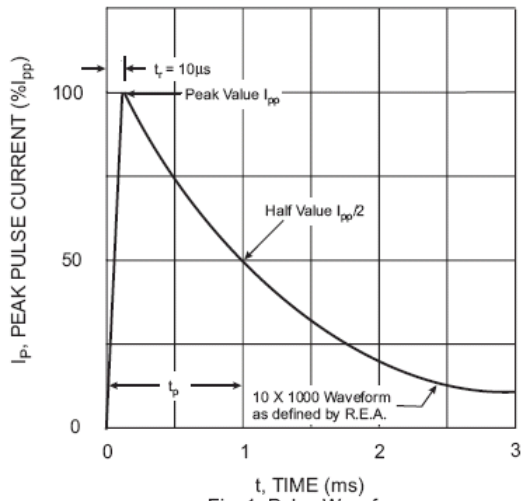


Fig. 1 Pulse Waveform

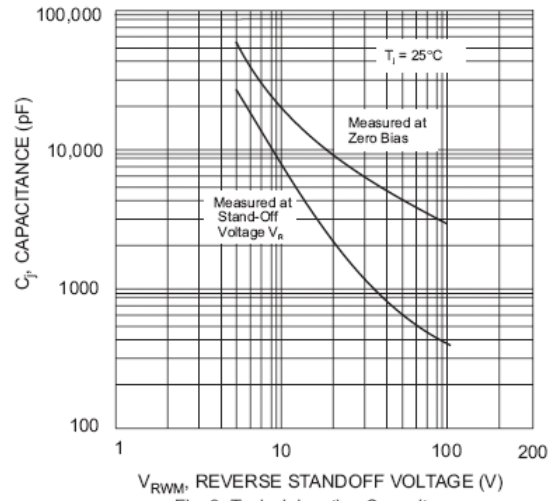


Fig. 2 Typical Junction Capacitance

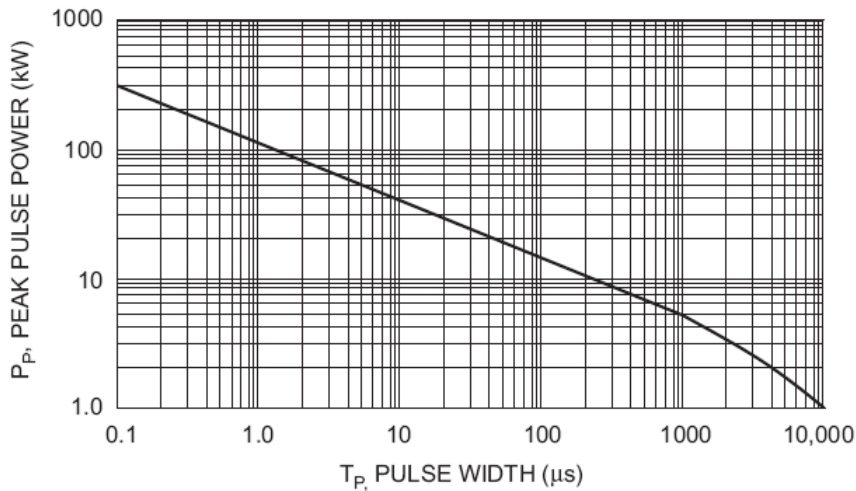


Fig. 3 Pulse Derating Curve

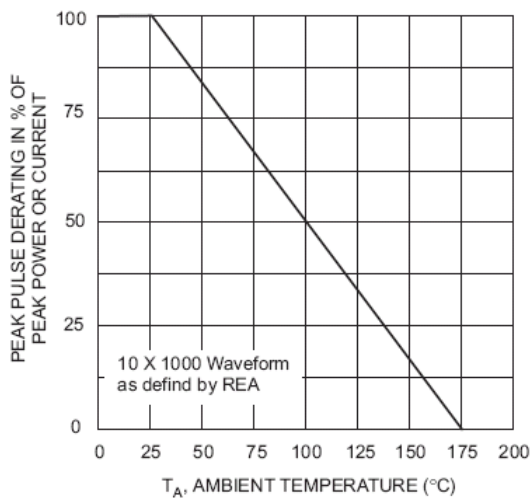


Fig. 4 Pulse Derating Curve

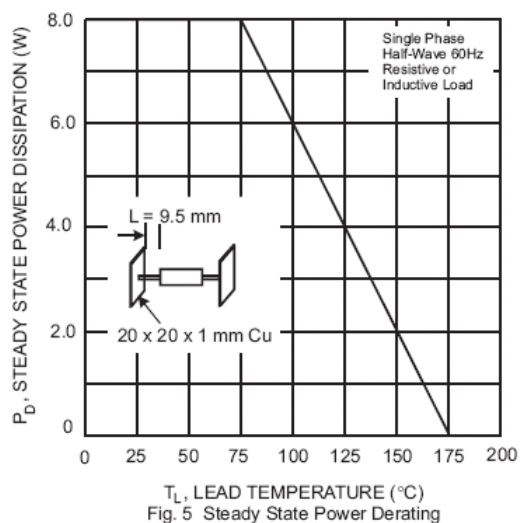


Fig. 5 Steady State Power Derating



Technical Data
Data Sheet N0214, Rev. -

Green Products

UNI-DIRECTIONAL 5000 WATT AXIAL LEAD TVS

UNI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
5KP120	120.00	133.00	169.00	5	214.0	23	10
5KP120A	120.00	133.00	153.00	5	193.0	20	10
5KP130	130.00	144.00	182.50	5	231.0	22	10
5KP130A	130.00	144.00	165.50	5	209.0	24	10
5KP150	150.00	167.00	211.50	5	268.0	19	10
5KP150A	150.00	167.00	192.50	5	243.0	21	10
5KP160	160.00	178.00	226.00	5	287.0	17	10
5KP160A	160.00	178.00	205.00	5	259.0	19	10
5KP170	170.00	189.00	239.50	5	304.0	16	10
5KP170A	170.00	189.00	217.50	5	275.0	18	10
5KP180	180.00	198.00	253.80	1	322.0	16	5
5KP180A	180.00	198.00	230.40	1	292.0	17	5
5KP190	190.00	209.00	267.90	1	340.0	15	5
5KP190A	190.00	209.00	243.20	1	308.0	16	5
5KP200	200.00	220.00	282.00	1	356.0	14	5
5KP200A	200.00	220.00	256.00	1	324.0	15	5
5KP210	210.00	231.00	296.10	1	376.0	13	5
5KP210A	210.00	231.00	268.80	1	340.0	15	5
5KP220	220.00	242.00	310.20	1	394.0	13	5
5KP220A	220.00	242.00	281.60	1	356.0	14	5

BI-DIRECTIONAL 5000 WATT AXIAL LEAD TVS

BI-DIRECTIONAL PART NUMBER	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
5KP120C	120.00	133.00	169.00	5	214.0	23	10
5KP120CA	120.00	133.00	153.00	5	193.0	20	10
5KP130C	130.00	144.00	182.50	5	231.0	22	10
5KP130CA	130.00	144.00	165.50	5	209.0	24	10
5KP150C	150.00	167.00	211.50	5	268.0	19	10
5KP150CA	150.00	167.00	192.50	5	243.0	21	10
5KP160C	160.00	178.00	226.00	5	287.0	17	10
5KP160CA	160.00	178.00	205.00	5	259.0	19	10
5KP170C	170.00	189.00	239.50	5	304.0	16	10
5KP170CA	170.00	189.00	217.50	5	275.0	18	10
5KP180C	180.00	198.00	253.80	1	322.0	16	5
5KP180CA	180.00	198.00	230.40	1	292.0	17	5
5KP190C	190.00	209.00	267.90	1	340.0	15	5
5KP190CA	190.00	209.00	243.20	1	308.0	16	5
5KP200C	200.00	220.00	282.00	1	356.0	14	5
5KP200CA	200.00	220.00	256.00	1	324.0	15	5
5KP210C	210.00	231.00	296.10	1	376.0	13	5
5KP210CA	210.00	231.00	268.80	1	340.0	15	5
5KP220C	220.00	242.00	310.20	1	394.0	13	5
5KP220CA	220.00	242.00	281.60	1	356.0	14	5



DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..