

TPK30KPXX TVS Rectifier


Applications:

- Protection from switching transients and induced RF

Features:

- Low profile surface mount
- Fast response
- Suppresses transients up to 30kW @ 10/1000µs and 200kW @ 8/20µs
- Marking : body marked with TPK30KPXXX
- This is a Pb – Free Device
- Open top for heat dissipation and different connection options
- All SMC parts are traceable to the wafer lot
- All part are 100% tested: electrical, 1x surge test, visual inspection
- Additional testing can be offered upon request

Mechanical Dimensions: In mm

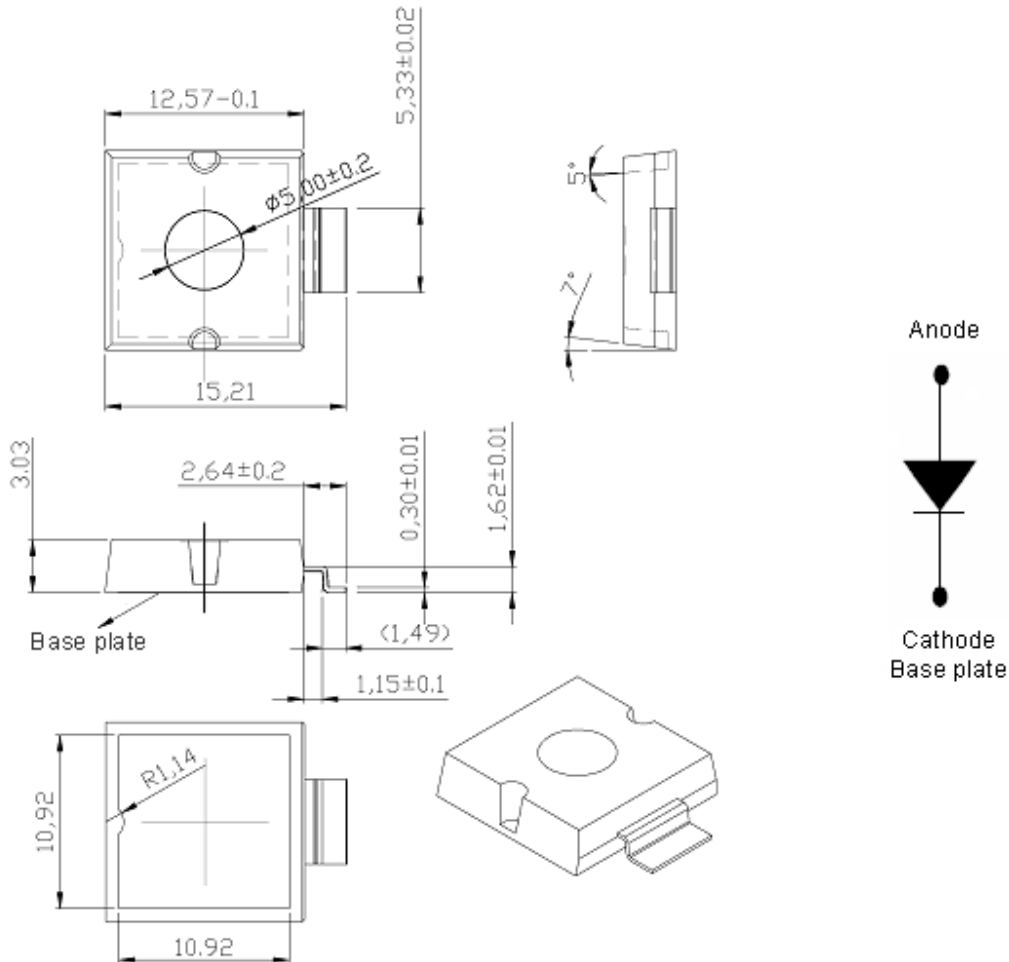

SPD-4

- China - Germany - Korea - Singapore - United States ●
- <http://www.smc-diodes.com> - sales@smc-diodes.com ●

**Maximum Ratings** @ $T_A=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$
Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	50	$^\circ\text{C/W}$
Thermal Resistance Junction to Case	$R_{\theta JC}$	1.0	$^\circ\text{C/W}$
Peak Pulse Power@10/1000 μ s(Note 2)	P_{PP}	30,000	W
$T_{P\text{clamping}}$ (0 volts to $V_{(BR)}$ min) Unidirectional		<100	ps
Forward Clamping Voltage @ 500 Amps (Note 3)	V_{FS}	4.0	V
Forward Surge Current (Note 3)	I_{FSM}	1500	A
Solder Temperature @ 10 s	T_{SP}	260	$^\circ\text{C}$
Steady-State Power dissipation @ $T_A = 25^\circ\text{C}$ @ $T_A = 100^\circ\text{C}$	P_D	2.5 (Note 1) 50 (Note 4)	W

- Note: 1. When mounted on FR4 board with recommended mounting pad(see pad layout).
2. With impulse repetition rate (duty factor) of 0.05% or less.
3. At 8.3ms Single half sine-wave (unidirectional devices only)
4. Case temperature controlled heat sink as specified.
5. See MicroNote 134 for derating when P_{PP} also applying steady-state power.

Technical Data
Green Products
Data Sheet N0051, Rev. E
ELECTRICAL CHARACTERISTICS @ 25 °C

Part Number (Unidirectional)	Part Number (Bidirectional)	Stand-off Voltage V_{wm} (Note 1) (V)	Breakdown Voltage V_{BR} @ I_{BR} (mA) (V)		Clamping Voltage V_c (10*1000) @ I_{PP} (V) Max	Stand By Current I_D @ V_{wm} (μ A) Max	Peak Pulse Current I_{pp} Max	Temperature Coefficient Of V_{BR} mV/°C Max
TPK30KP20	TPK30KP20C	20	22.2-27.1	5	37.6	45	798	19
TPK30KP20A	TPK30KP20CA	20	22.2-24.5	5	34.0	45	882	18
TPK30KP22	TPK30KP22C	22	24.4-29.8	5	40.2	10	747	22
TPK30KP22A	TPK30KP22CA	22	24.4-26.9	5	36.4	10	822	20
TPK30KP24	TPK30KP24C	24	26.7-32.6	5	44.0	10	681	24
TPK30KP24A	TPK30KP24CA	24	26.7-29.5	5	39.8	10	753	22
TPK30KP26	TPK30KP26C	26	28.9-35.3	5	47.6	10	630	27
TPK30KP26A	TPK30KP26CA	26	28.9-31.9	5	43.0	10	696	24
TPK30KP28	TPK30KP28C	28	31.1-38.0	5	51.6	10	582	29
TPK30KP28A	TPK30KP28CA	28	31.1-34.4	5	46.4	10	645	26
TPK 30KP30	TPK 30KP30C	30	33.3-40.7	5	53.8	10	564	36
TPK 30KP30A	TPK 30KP30CA	30	33.3-36.8	5	48.8	10	618	30
TPK30KP33	TPK30KP33C	33	36.7-44.9	5	59.0	10	510	37
TPK30KP33A	TPK30KP33CA	33	36.7-40.6	5	53.3	10	564	35
TPK30KP36	TPK30KP36C	36	40.0-48.9	5	63.4	10	468	40
TPK30KP36A	TPK30KP36CA	36	40.0-44.2	5	58.1	10	516	38
TPK30KP40	TPK30KP40C	40	44.4-54.3	5	71.4	10	420	48
TPK30KP40A	TPK30KP40CA	40	44.4-49.1	5	64.5	10	468	44
TPK30KP43	TPK30KP43C	43	47.8-58.4	5	76.7	10	390	53
TPK30KP43A	TPK30KP43CA	43	47.8-52.8	5	69.4	10	432	50
TPK30KP45	TPK30KP45C	45	50.0-61.1	5	80.3	10	372	54
TPK30KP45A	TPK30KP45CA	45	50.0-55.3	5	72.7	10	414	51
TPK30KP48	TPK30KP48C	48	53.3-65.1	5	85.5	10	348	60
TPK30KP48A	TPK30KP48CA	48	53.3-58.9	5	77.4	10	390	54
TPK30KP51	TPK30KP51C	51	56.7-69.3	5	91.1	10	330	65
TPK30KP51A	TPK30KP51CA	51	56.7-62.7	5	82.4	10	366	58
TPK30KP54	TPK30KP54C	54	60.0-73.3	5	96.3	10	312	68
TPK30KP54A	TPK30KP54CA	54	60.0-66.3	5	87.1	10	342	64
TPK30KP58	TPK30KP58C	58	64.4-78.7	5	103.0	10	294	75
TPK30KP58A	TPK30KP58CA	58	64.4-71.2	5	93.6	10	318	70
TPK30KP60	TPK30KP60C	60	66.7-81.5	5	107.0	10	282	80
TPK30KP60A	TPK30KP60CA	60	66.7-73.7	5	96.8	10	312	72
TPK30KP64	TPK30KP64C	64	71.1-86.9	5	114.0	10	264	85
TPK30KP64A	TPK30KP64CA	64	71.1-78.6	5	103.0	10	294	75

Technical Data
Green Products
Data Sheet N0051, Rev. E

Part Number (Unidirectional)	Part Number (Bidirectional)	Stand-off Voltage V_{WM} (Note 1) (V)	Breakdown Voltage V_{BR} @ I_{BR} (mA) (V)		Clamping Voltage V_C (10×1000) @ I_{PP} (V) Max	Stand By Current I_D @ V_{WM} (μA) Max	Peak Pulse Current I_{PP} Max	Temperature Coefficient Of V_{BR} $mV/^\circ C$ Max
TPK30KP70	TPK30KP70C	70	77.8-95.1	5	125	10	240	93
TPK30KP70A	TPK30KP70CA	70	77.8-86.0	5	113	10	264	84
TPK30KP75	TPK30KP75C	75	83.3-102.0	5	134	10	222	100
TPK30KP75A	TPK30KP75CA	75	83.3-92.1	5	121	10	246	90
TPK30KP78	TPK30KP78C	78	86.7-106.0	5	139	10	216	104
TPK30KP78A	TPK30KP78CA	78	86.7-95.8	5	126	10	240	95
TPK30KP85	TPK30KP85C	85	94.4-115.0	5	151	10	198	115
TPK30KP85A	TPK30KP85CA	85	94.4-104.0	5	137	10	216	104
TPK30KP90	TPK30KP90C	90	100-122	5	160	10	186	120
TPK30KP90A	TPK30KP90CA	90	100-111	5	146	10	204	109
TPK30KP100	TPK30KP100C	100	111-136	5	179	10	168	134
TPK30KP100A	TPK30KP100CA	100	111-123	5	162	10	186	122
TPK30KP110	TPK30KP110C	110	122-149	5	196	10	156	147
TPK30KP110A	TPK30KP110CA	110	122-135	5	177	10	168	132
TPK30KP120	TPK30KP120C	120	133-163	5	214	10	140	161
TPK30KP120A	TPK30KP120CA	120	133-147	5	193	10	156	145
TPK30KP130	TPK30KP130C	130	144-176	5	231	10	130	174
TPK30KP130A	TPK30KP130CA	130	144-159	5	209	10	142	157
TPK30KP150	TPK30KP150C	150	167-204	5	268	10	112	202
TPK30KP150A	TPK30KP150CA	150	167-185	5	243	10	124	183
TPK30KP160	TPK30KP160C	160	178-218	5	287	10	104	216
TPK30KP160A	TPK30KP160CA	160	178-197	5	259	10	116	195
TPK30KP170	TPK30KP170C	170	189-231	5	304	10	98	229
TPK30KP170A	TPK30KP170CA	170	189-209	5	275	10	110	207
TPK30KP180	TPK30KP180C	180	200-244	5	321	10	94	242
TPK30KP180A	TPK30KP180CA	180	200-221	5	291	10	104	219
TPK30KP200	TPK30KP200C	200	222-271	5	356	10	84	269
TPK30KP200A	TPK30KP200CA	200	222-245	5	322	10	94	243
TPK30KP220A	TPK30KP220CA	220	245-271	5	356	10	84	269
TPK30KP260A	TPK30KP260CA	260	289-320	5	419	10	71	318
TPK30KP280A	TPK30KP280CA	280	311-345	5	451	10	66	344
TPK30KP300A	TPK30KP300CA	300	333-369	5	483	10	62	368
TPK30KP350A	TPK30KP350CA	350	389-431	5	564	10	53	430
TPK30KP400A	TPK30KP400CA	400	444-492	5	644	10	46	490

NOTE 1: Transient Voltage Suppressors are normally selected with reverse "Stand Off Voltage" V_{WM} which should be equal to or greater than the dc or continuous peak operating voltage level.

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •



SYMBOLS & DEFINITIONS			
Symbol	Definition	Symbol	Definition
V_{WM}	Working Peak(Standoff) Voltage	I_{PP}	Peak Pulse Current
$V_{(BR)}$	Breakdown Voltage	V_C	Claming Voltage
I_D	Standby Current	$I_{(BR)}$	Breakdown Current for $V_{(BR0)}$



DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..