

S3D03065T 3A 650V SIC POWER SCHOTTKY RECTIFIERS



Features

- 175°C T_J operation
- Ultra-low switching loss
- Switching speeds independent of operating temperature
- Low total conduction losses
- High forward surge current capability
- High package isolation voltage
- Terminals finish: 100% Pure Tin
- “-A” is an AEC-Q101 qualified device
- Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional electrical and life testing can be performed upon request

Circuit Diagram



Description

This 650V 3A diode is high voltage Schottky rectifier that has very low total conduction losses and very stable switching characteristics over temperature extremes. The S3D03065T is ideal for energy sensitive, high frequency applications in challenging environments.

Applications

- Alternative energy inverters
- Power Factor Correction (PFC)
- Free-Wheeling diodes
- Switching supply output rectification
- Reverse polarity protection

Maximum Ratings@T_A=25°C unless otherwise specified

Characteristics	Symbol	Condition	Max.	Units
Peak Repetitive Reverse Voltage	V _{RRM}	-	650	V
Working Peak Reverse Voltage	V _{RWM}			
DC Blocking Voltage	V _{DC}			
Average Rectified Forward Current	I _{F(AV)1}	T _c =25°C	6	A
	I _{F(AV)2}	T _c =100°C	4	A
	I _{F(AV)3}	T _c =125°C	3	A
Repetitive Peak Forward Surge Current	I _{FRM1}	10ms, Half Sine pulse, T _c =25°C	6	A
	I _{FRM2}	10ms, Half Sine pulse, T _c =110°C	4	A
Peak One Cycle Non-Repetitive Surge Current	I _{FSM1}	10ms, Half Sine pulse, T _c =25°C	12	A
	I _{FSM2}	10ms, Half Sine pulse, T _c =110°C	9	A
Power Dissipation	P _{tot1}	T _c =25°C	15	W
	P _{tot2}	T _c =110°C	6.5	W

Electrical Characteristics@T_A=25°C unless otherwise specified

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	V _{F1}	@ 3A, Pulse, T _J = 25 °C	1.4	1.7	V
	V _{F2}	@ 3A, Pulse, T _J = 175 °C	1.6	2.0	V
Reverse Current*	I _{R1}	@V _R = rated V _R T _J = 25 °C	0.03	2	uA
	I _{R2}	@V _R = rated V _R T _J = 175 °C	0.3	20	uA
Junction Capacitance	C _T	V _R =0V, T _J =25°C, f=1MHz	230	-	pF
Reverse Recovery Charge	Q _c	I _F = 3A, di/dt = 200A/μs V _R = 400 V, T _J =25°C	14.35	-	nC
Capacitance Stored Energy	E _c	V _R = 400 V, T _J =25°C	3.51	-	μJ

* Pulse width < 300 μs, duty cycle < 2%

Thermal-Mechanical Specifications:

Characteristics	Symbol	S3D03065T	Units
Junction Temperature	T_J	-55 to +175	°C
Storage Temperature	T_{stg}	-55 to +175	°C
Typical Thermal Resistance Junction to Case	R_{qJC}	10	°C/W

Marking Diagram



Where XXXX is YYWWL

S = Device Type
 65 = Reverse Voltage (650V)
 3 = Forward Current (3A)
 T = Package type
 YY = Year
 WW = Week
 L = Lot Number

Cautions: Molding resin
 Epoxy resin UL:94V-0

Ordering Information

Device	Package	Shipping
S3D03065T	SOD-123FL	3000pcs / reel

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

Ratings and Characteristics Curves

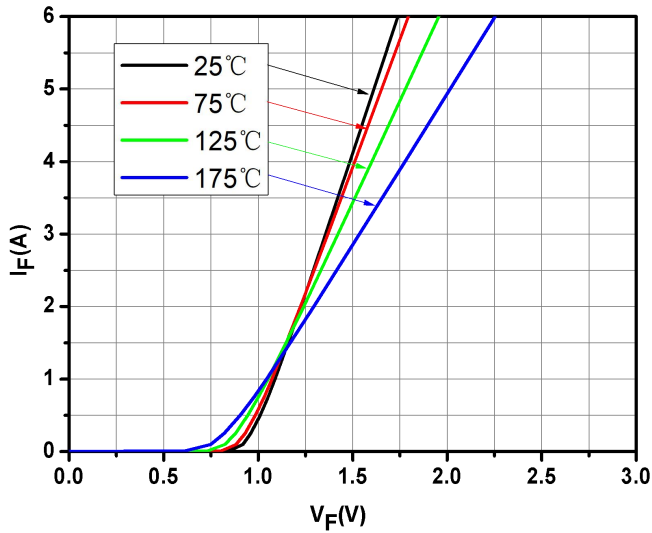


Fig.1-Typical Forward Voltage Characteristics

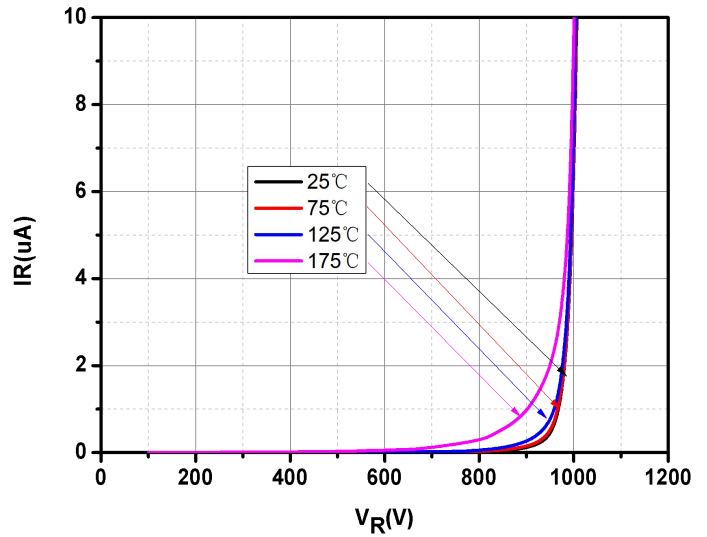


Fig.2-Typical Reverse Characteristics

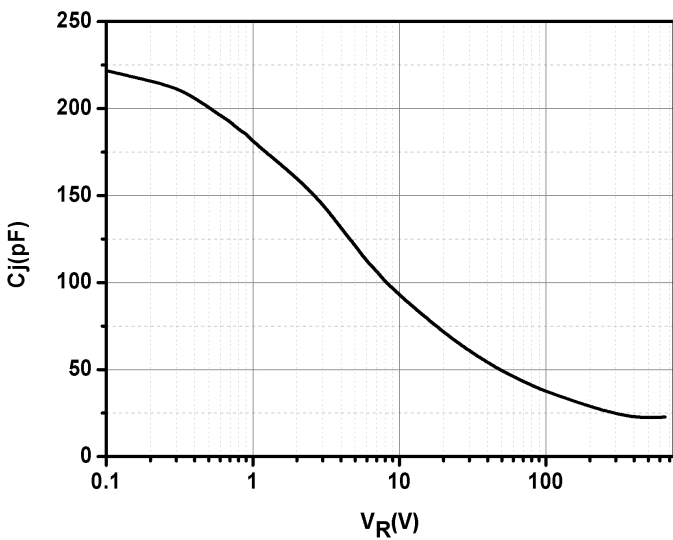


Fig.3-Capacitance vs. Reverse Voltage

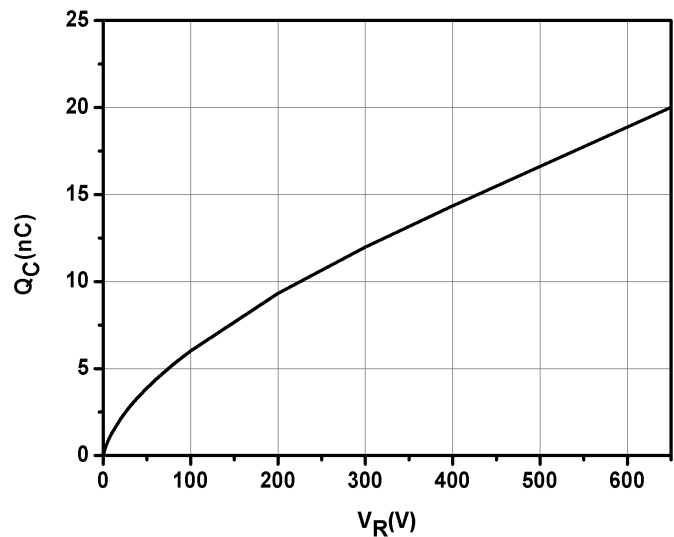


Fig.4-Total Capacitance Charge vs. Reverse Voltage

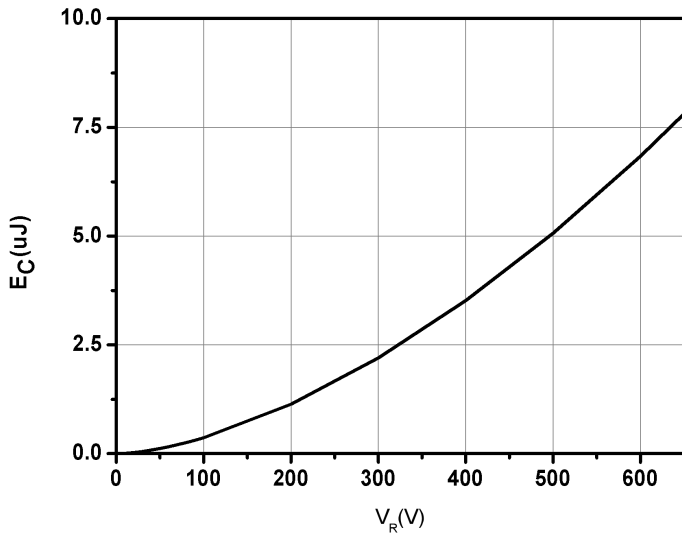


Fig.5-Capacitance Stored Energy

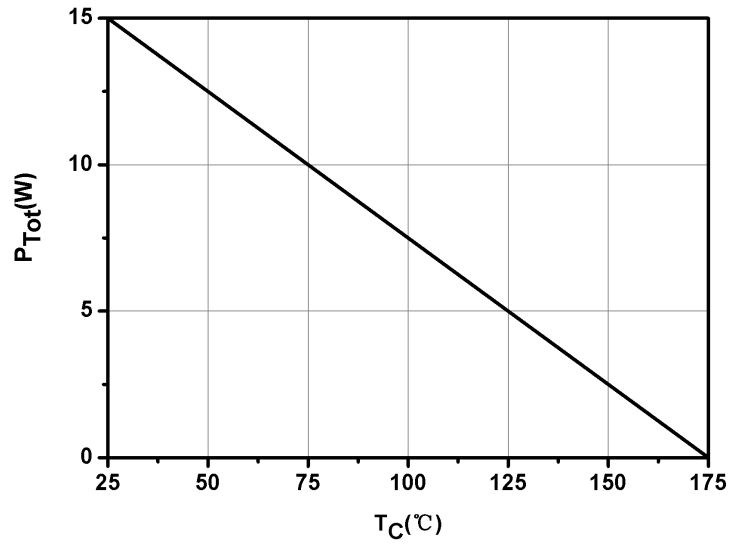


Fig.6-Power Derating


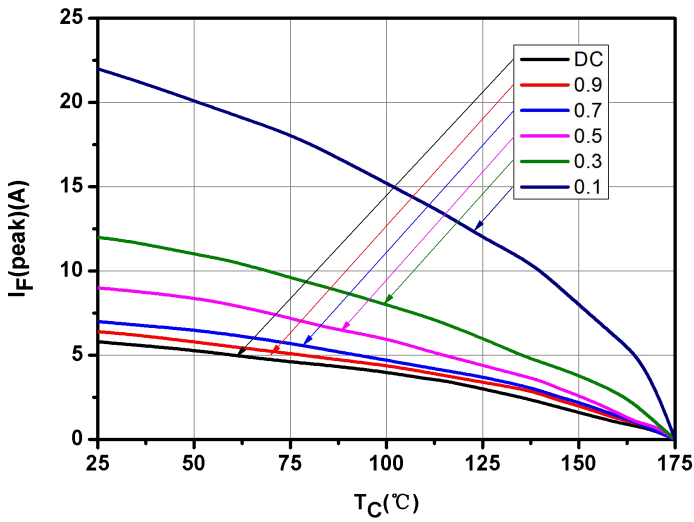



Fig.7-Current Derating

Carrier Tape & Reel Specification SOD-123FL

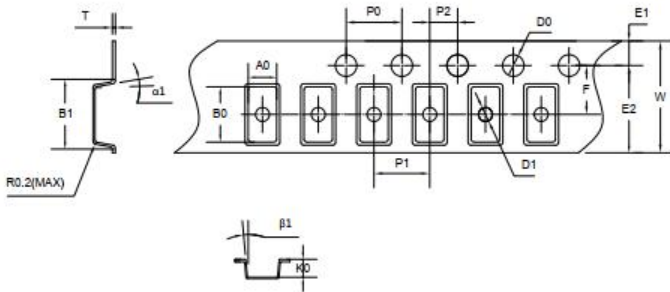

项目	规格(mm)	允差(mm)	项目	规格(mm)	允差(mm)
W	8.00	+0.30/-0.10	A0	2.05	±0.10
E1	1.75	±0.10	B0	3.95	±0.10
F	3.50	±0.05	K0	1.45	±0.10
D0	1.50	+0.1/-0.0	T	0.23	±0.02
D1	1.00	+0.25/-0.0	10*P0	40.00	±0.20
P0	4.00	±0.10	α1	4°max	
P1	4.00	±0.10	β1	8°max	
P2	2.00	±0.05	B1 _{max}	4.35	
			E2 _{min}	6.25	

Mechanical Dimensions SOD-123FL

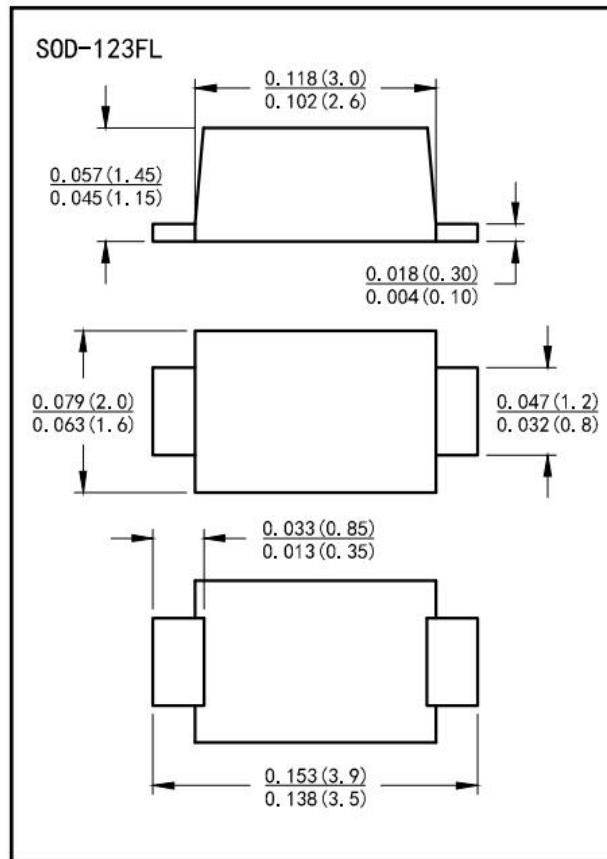

Technical Data
Data Sheet N2748, REV.-



DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..